

# Quick Start Guide

Wired Floodlight Camera

# Let's get started

- 1 Please scan QR code with your phone camera to watch this video and familiarize yourself with the installation process.



Or go to [arlo.com/install/wiredfloodlight](https://arlo.com/install/wiredfloodlight)

- 2 Download the Arlo Secure App and create an account or log in to your existing account.




Or go to [arlo.com/app/secure/](https://arlo.com/app/secure/)

- 3 In the app tap **Devices** and then ⊕ , select **Lights > Wired Floodlight Camera** and follow the prompts or this guide.


- 4 Grab your Phillips-head Screwdriver, Flat-head Screwdriver, drill, and ladder.

**Note:** This guide demonstrates how to wall-mount your Wired Floodlight Camera, directions for ceiling mounting can be found in the Arlo Secure App.

# What's in the box



Wired Floodlight  
Camera



Junction Box



3x Junction  
Box Mounting  
Screws  
(Bag A)



3x Wall Anchors  
(Bag B)



1x Floodlight  
Mounting Screw  
(Bag C)




1x Floodlight  
Mounting Screw Cap  
(Bag D)




1x S-Hook

# Get to know your Arlo Floodlight

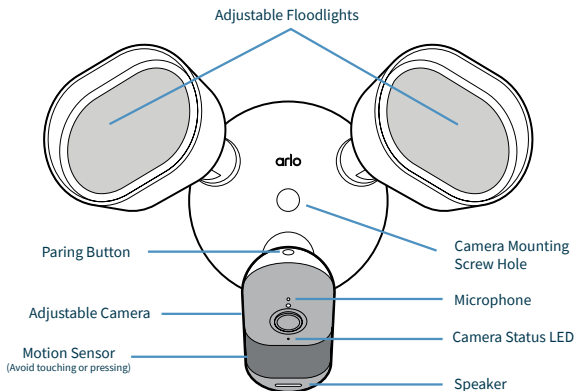

## Mounting Options




Wall Mount



Ceiling Mount

# Get to know your Junction Box

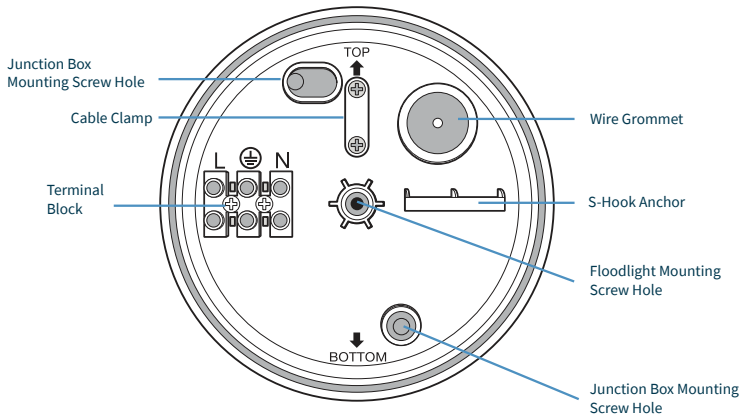




**WARNING:** Risk of electrical shock and fire. Do not install wired floodlight camera (“Fixture”) near combustible or flammable surfaces. **Installation must be performed by a licensed electrician.**

- Always follow local building codes, standards, and regulations.
- Existing electrical wires are required for Fixture installation.
- Disconnect power at the fuse or circuit breaker powering the Fixture before installing. Failure to disconnect power might result in serious injury.
- Verify supply voltage is correct. Connect Fixture to a 100 VAC~240 VAC 50/60 Hz power source.
- Properly ground Fixture.
- Do not connect the Fixture to a dimmer switch or timer.

## Installation steps


1



### Before you Begin

- Turn off power to the fixture you are replacing at the breaker. Failure to do so may result in serious injury.
- Make sure there is no power to an existing fixture. Then, remove any existing fixture and mounting hardware.

2





## Prepare Junction Box

- Run the power cable through the wire grommet in the Junction Box.
- Remove the two smaller rubber plugs from the Junction Box and set them aside for later use.
- For optimal structural integrity, try to orient the Junction Box so that the word “TOP” with the arrow pointing up is located at the top of the Junction Box, and the word “BOTTOM” with the arrow pointing down is located at the bottom.

3


Hard Materials



## Install Junction Box

- Use the mounting holes as guides to mark two drill holes.
- On walls made of wood, pre-drill holes with a 3 mm (1/8-inch) drill bit. Use the Junction Box Mounting Screws from Bag A to secure your Junction Box.
- On walls made of hard materials (such as stucco, brick, or concrete), pre-drill holes with a 6 mm (15/64-inch) drill bit. Then, insert the Wall Anchors from Bag B into the holes. Use Junction Box Mounting Screws from Bag A to secure your Junction Box.
- Cover the mounting holes with the two rubber plugs to seal the Junction Box Mounting Screws.



4





## Release Cable Clamp

- Use your Philips-head screwdriver to remove one screw from the cable clamp to release it. Rotate the cable clamp to the side, and set the screw aside for later use.
- Run the power cable through the opening.

5



## Connect Wall Wiring

- Use your flat-head screwdriver to loosen the top three bolts from the terminal blocks marked “L”, , and “N”.
- Slide the power cable’s GREEN/YELLOW (Ground/Earth) wire into the top of the terminal block marked with . Tighten with your flat-head screwdriver.
- Slide the power cable’s BROWN (Line/Live) wire into the top of the terminal block marked with “L”. Tighten with your flat-head screwdriver.
- Slide the power cable’s BLUE (Neutral) wire into the top of the terminal block marked with “N”. Tighten with your flat-head screwdriver.
- Reposition cable clamp to now hold the power cable in place. Use your Philips-head screwdriver to replace its screw.




6



## Use S-Hook

- Attach one end of the S-Hook to camera for support during installation. Hang camera and floodlights upside down. Position the back of the floodlight base to face the wall to avoid damage to the camera's surface.
- Hang the other end of S-Hook from either ring of the S-Hook Hanger.

7




## Connect Floodlight Wiring

- Use your flat-head screwdriver to loosen the bottom two bolts from the terminal blocks marked “L” and “N”.
- Slide the power cable's BROWN (Line/Live) wire into the bottom of the terminal block marked with “L”. Tighten with your flat-head screwdriver.
- Slide the power cable's BLUE (Neutral) wire into the bottom of the terminal block marked with “N”. Tighten with your flat-head screwdriver.



**WARNING:** Risk of electrical shock and fire. Do not install wired floodlight camera (“Fixture”) near combustible or flammable surfaces. **Installation must be performed by a licensed electrician.**

- Always follow local building codes, standards, and regulations.
- Existing electrical wires are required for Fixture installation.
- Disconnect power at the fuse or circuit breaker powering the Fixture before installing. Failure to disconnect power might result in serious injury.
- Verify supply voltage is correct. Connect Fixture to a 100 VAC~240 VAC 50/60 Hz power source.
- Properly ground Fixture.
- Do not connect the Fixture to a dimmer switch or timer.



## Complete Assembly

- Tuck all wires into the Junction Box and remove S-Hook.
- Rotate Floodlight Camera so lights are at the top. Align the Floodlight Mounting Screw Hole with the central hole of the Junction Box.
- Secure Floodlight Camera to the Junction Box by inserting and tightening the Floodlight Mounting Screw from Bag C through the centrally aligned holes.
- Seal the Floodlight Mounting Screw with the Floodlight Mounting Screw Cap from Bag D.



## Restore Power and Onboard Floodlight

- Turn on power at the breaker.
- You'll know your Floodlight is receiving power when the LED on the front of the Floodlight Camera is solid blue. Remain close to your Floodlight Camera as you onboard it in the Arlo Secure App.
- Open the Arlo Secure App, tap **Devices** and then **+**, and select **Lights > Wired Floodlight Camera** and follow the prompts to finish setting up your Floodlight Camera.

# Total protection starts with Arlo Secure

Arlo Secure plan trial is included with purchase. A paid plan after trial is required to keep premium features.

Visit [arlo.com/arlosecure](https://arlo.com/arlosecure) to learn more about premium features:

- 30-Day Video Recordings in Secure Cloud
- Smart Interactive Notifications
- Advanced Object Detection
- Smart Activity Zones

## Need help?

We are here for you.

Visit [arlo.com/support](https://arlo.com/support) for:

- Quick answers
- How-to videos
- Troubleshooting tips
- Additional support resources





© Arlo Technologies, Inc. Arlo, Arlo logo, and Every Angle Covered are trademarks of Arlo Technologies, Inc. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC. Any other trademarks are for reference purposes.

For regulatory compliance information including the EU Declaration of Conformity, visit [www.arlo.com/about/regulatory/](http://www.arlo.com/about/regulatory/).

© Arlo Technologies, Inc. Arlo, le logo Arlo et Every Angle Covered sont des marques de commerce d'Arlo Technologies, Inc. App Store est une marque de service d'Apple Inc. Google Play et le logo Google Play sont des marques de commerce de Google LLC. Toute autre marque de commerce n'est utilisée qu'à titre de référence.

Pour obtenir des renseignements sur la conformité, y compris la déclaration de conformité de l'UE, visitez [www.arlo.com/about/regulatory/](http://www.arlo.com/about/regulatory/).

© Arlo Technologies, Inc. Arlo, el logotipo de Arlo y Every Angle Covered son marcas comerciales de Arlo Technologies, Inc. App Store es una marca de servicio de Apple Inc. Google Play y el logotipo de Google Play son marcas comerciales de Google LLC. Cualquier otra marca comercial se utiliza solo con fines de referencia.

Para obtener información sobre el cumplimiento de normativas, incluida la declaración de conformidad de la Unión Europea, visite [www.arlo.com/about/regulatory/](http://www.arlo.com/about/regulatory/).

CAN ICES (B) / NMB (B)



Arlo Technologies Intl. Ltd  
Ground Floor, Building 3  
University Technology Centre  
Curraheen Road, Cork T12 EF21 Ireland

Arlo Technologies UK Limited  
280 Bishopsgate  
London, EC2M 4RB

Arlo Technologies, Inc.  
5770 Fleet Street, Suite 200  
Carlsbad, CA 92008 USA

September 2024



201-50789-03