Thank you for choosing the Arlo Total Detection Package for Allstate.

This additional reference guide provides step-by-step instructions for setting up and optimizing your system to help protect your home against risks like intruders, smoke-related damage, and water leaks.

Arlo Total Detection Package for Allstate Includes:

- (3) Sensors for water leak detection
- (2) Sensors for open/close detection
- (1) Keypad Sensor Hub with built-in smoke alarm detection
- (1) Arlo Security Yard Sign
- Arlo Secure Premium Plan with Professional Monitoring (1 year prepaid)

What to Expect After Installation

Step 1: Please complete your Arlo Total Detection Package onboarding and installation within two weeks of receipt. Arlo will begin proactive outreach to assist after two weeks

Step 2: Arlo will email you to confirm your system is properly installed and provide you with a link to download your Arlo Monitoring Certificate

Step 3: Upload your certificate to your **Allstate MyAccount** to obtain your Protective Device Discount*


Congratulations on protecting your home. Remember, you can always adjust notification settings via the Arlo app and customize alerts for any water, fire, or intrusion threats recognized by your Arlo Keypad Sensor Hub and Sensors.




*Subject to terms & eligibility requirements; Protective Device Discount not available in every state and is issued by Allstate. For questions related to the Protective Device Discount call the Allstate Customer Contact Center at (800) 255-7828

Account Creation

1. Download or update **Arlo Secure App** to latest version from the App Store or Google Play Store
2. Create an Arlo account or log in to your existing Arlo account – your 1-year prepaid Arlo subscription will be recognized when you onboard your Keypad Sensor Hub

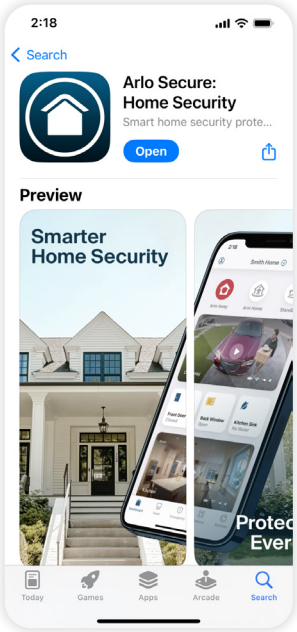


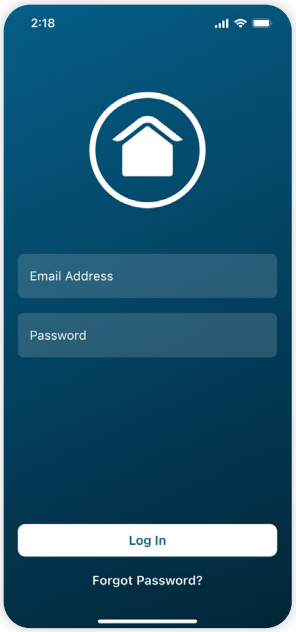


Set Up Keypad Sensor Hub to Control Your System

Position your Keypad Sensor Hub within 15 feet of a smoke detector to enable smoke detector listening features.


1. From the **Devices tab**, tap ⊕ to add device
2. Select **"Security System"**
3. Follow the steps in the Arlo Secure App to set up Keypad Sensor Hub and update to latest firmware

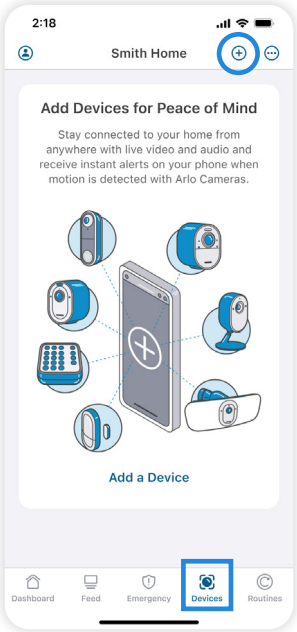

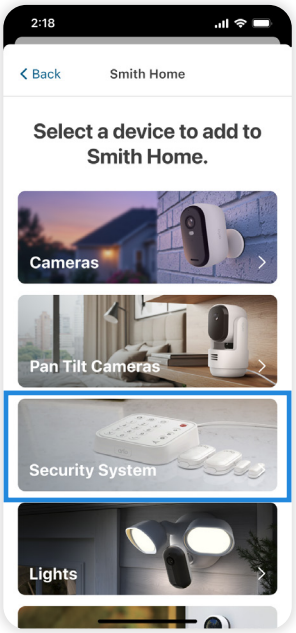


Set Up All-In-One Sensors for Water Leak Detection


Protect your home using (3) Arlo Sensors to detect water leaks near potential leak sources like your dishwasher, washing machine, or water heater. **Choose 3 placements to provide the best coverage based on your home.**

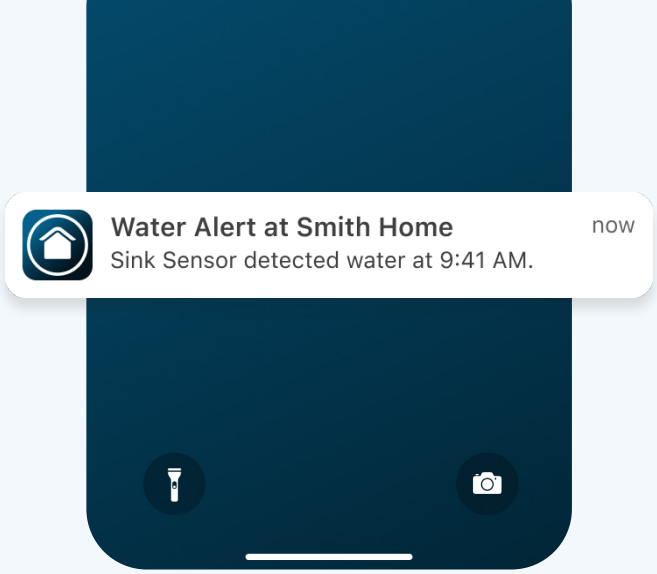

1. Select the first All-in-One Sensor from the device setup list
   (Note: you can only onboard one Sensor at a time)
2. Follow steps in Arlo Secure App to discover and pair Sensor to the Keypad Sensor Hub
3. Name your Sensor based on your desired location to monitor:

Recommended Placements
Basement
Dishwasher
Washing Machine
Water Heater
Sump Pump
Toilet
Refrigerator

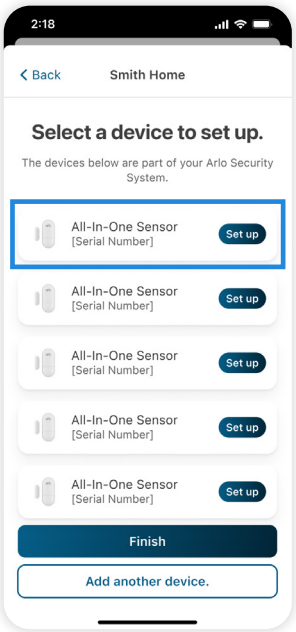


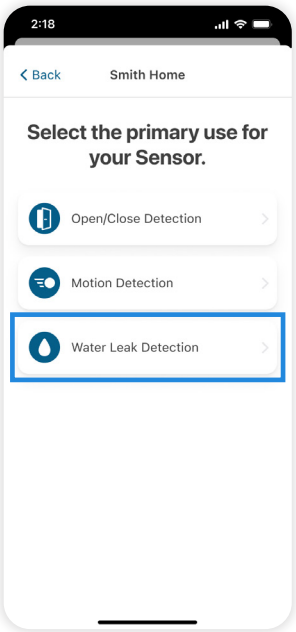

4. Primary purpose of Sensor – Select **“Water Leak Detection”**
5. Follow steps in Arlo Secure App to finish the setup process. ***Be sure to place the Sensor so any water leak puddles would touch the two pins under the Sensor base***
6. Repeat this process to set up the other two Sensors

Set Up All-In-One Sensors for Open/Close Detection


Protect your home by using (2) Arlo Sensors to detect the opening or closing of doors and windows to monitor your home for unwanted visitors.

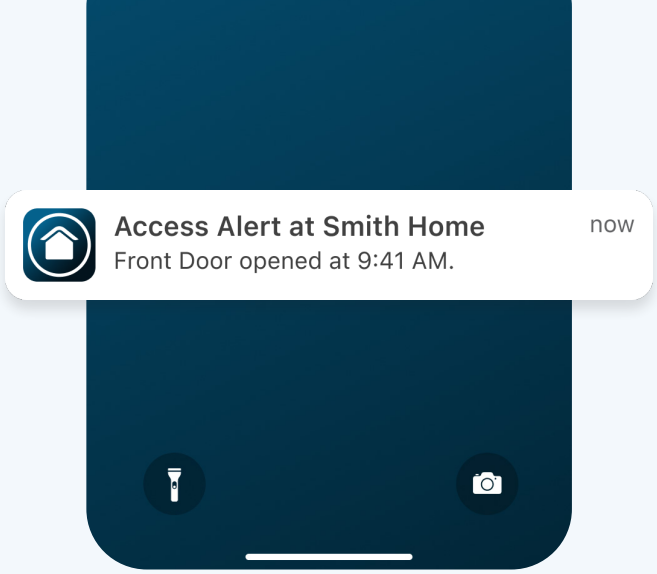


1. Select the next All-in-One Sensor from the device setup list
2. Follow steps in Arlo Secure App to discover and pair Sensor to the Keypad Sensor Hub
3. Name your Sensor based on your desired location to monitor:

Recommended Placements
Front Door
Back Door
Side Door
Living Room Window
Bedroom Window


4. Primary purpose of Sensor – Select **“Open/Close Detection”**
5. Follow the steps in the Arlo Secure App to finish the setup process and mount your Sensor to the desired door or window
6. Repeat this process to set up the remaining Sensor

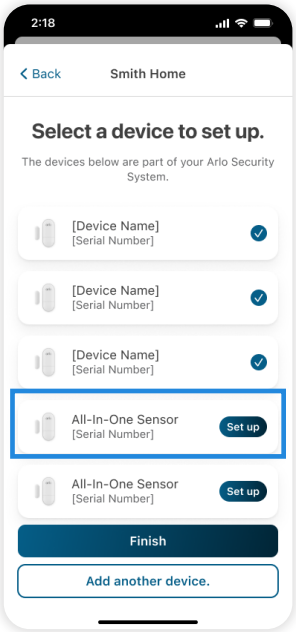

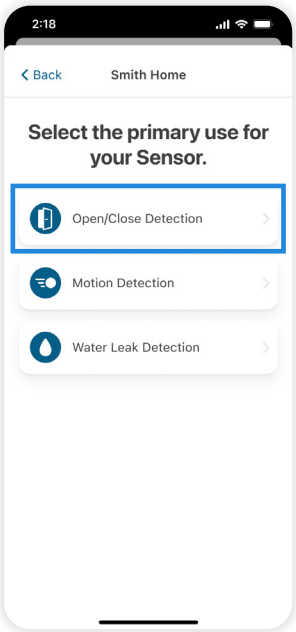


Set Up Keypad Sensor Hub for Smoke Alarm Listening Detection


Use your Keypad Sensor Hub to protect your home from fire emergencies with Smoke Alarm listening.

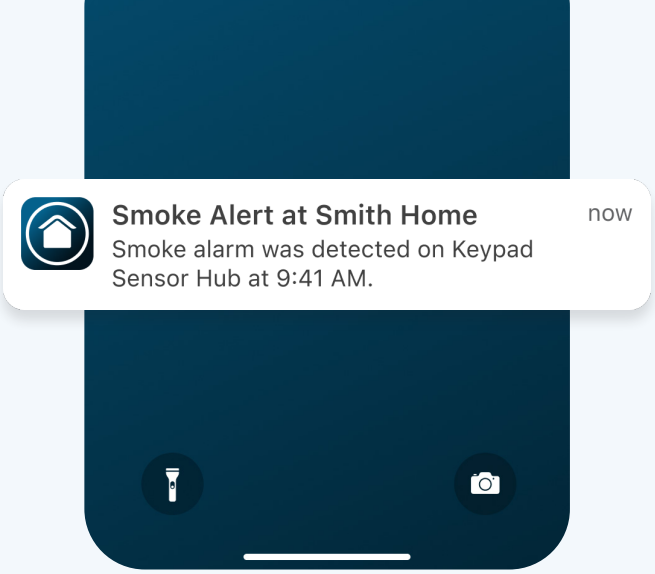



1. Navigate to the **Devices tab** in the Arlo Secure App
2. Tap the **Settings icon on the Keypad Sensor Hub** to access **Device Settings**
3. Enable **Smoke/CO Alarm** in the list of sensing elements
4. Follow steps in Arlo Secure App to ***complete the test within 15' of your existing smoke alarm***
5. When your smoke alarm test beeps are successfully recognized, return to the **Device Settings for your Keypad Sensor Hub** to verify the toggle is turned on and listening test is marked as **"Passed"**

(Note: If the test doesn't work, your smoke alarm may not be compatible)

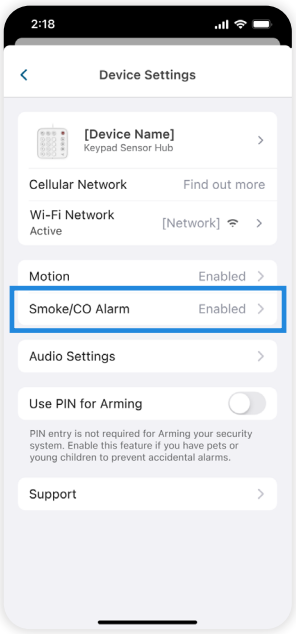

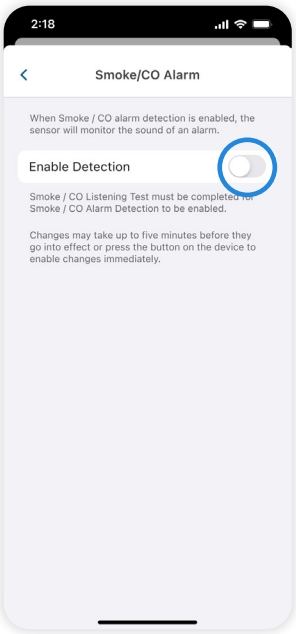

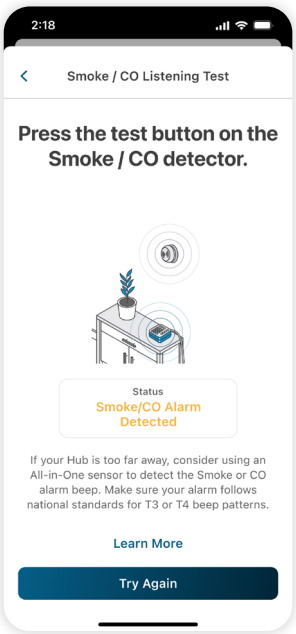

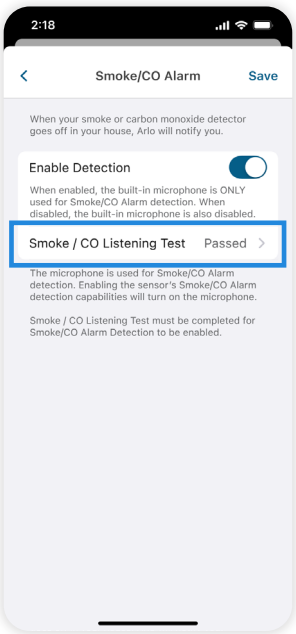

You’re all set.

Congratulations on your home being protected by Arlo.

